

Technical Specifications

PlugTail™ Specification Grade Receptacles


2 Pole, 3 Wire Grounding 15 & 20A, 125V

Pass & Seymour




Typical Specifications	
Manufacturer's Identification: Pass & Seymour/Legrand PT5262	
Description: Plugtail™ Straight Blade Duplex Receptacle – Specification Grade	
Type: 2 Pole, 3 Wire Grounding	
Rating: 15A, 125V	
3rd Party Compliance: cULus Listed, File Number E140596, Standard UL498.	
Federal Specification WC596. Conforms to NEMA WD-1 and WD-6.	


Catalog Number	Color	Rating	NEMA Config. No.	Catalog Number	Color	Rating	NEMA Config. No.
<input type="checkbox"/> PT5262I	Ivory	15A 125V	5-15R	<input type="checkbox"/> PTIG5262I	Ivory	15A 125V	5-15R
<input type="checkbox"/> PT5262W	White	15A 125V	5-15R	<input type="checkbox"/> PTIG5262W	White	15A 125V	5-15R
<input type="checkbox"/> PT5262	Brown	15A 125V	5-15R	<input type="checkbox"/> PTIG5262	Orange	15A 125V	5-15R
<input type="checkbox"/> PT5262GRY	Gray	15A 125V	5-15R	<input type="checkbox"/> PTIG5262GRY	Gray	15A 125V	5-15R
<input type="checkbox"/> PT5262BK	Black	15A 125V	5-15R	<input type="checkbox"/> PTIG5262RED	Red	15A 125V	5-15R
<input type="checkbox"/> PT5262BL	Blue	15A 125V	5-15R	<input type="checkbox"/> PTIG5262LA	Lt. Al.	15A 125V	5-15R
<input type="checkbox"/> PT5262RED	Red	15A 125V	5-15R				
<input type="checkbox"/> PT5262LA	Lt. Al.	15A 125V	5-15R				
<input type="checkbox"/> PT5362I	Ivory	20A 125V	5-20R	<input type="checkbox"/> PTIG5362I	Ivory	20A 125V	5-20R
<input type="checkbox"/> PT5362W	White	20A 125V	5-20R	<input type="checkbox"/> PTIG5362W	White	20A 125V	5-20R
<input type="checkbox"/> PT5362	Brown	20A 125V	5-20R	<input type="checkbox"/> PTIG5362	Orange	20A 125V	5-20R
<input type="checkbox"/> PT5362GRY	Gray	20A 125V	5-20R	<input type="checkbox"/> PTIG5362GRY	Gray	20A 125V	5-20R
<input type="checkbox"/> PT5362BK	Black	20A 125V	5-20R	<input type="checkbox"/> PTIG5362RED	Red	20A 125V	5-20R
<input type="checkbox"/> PT5362BL	Blue	20A 125V	5-20R	<input type="checkbox"/> PTIG5362LA	Lt. Al.	20A 125V	5-20R
<input type="checkbox"/> PT5362RED	Red	20A 125V	5-20R				
<input type="checkbox"/> PT5362LA	Lt. Al.	20A 125V	5-20R				

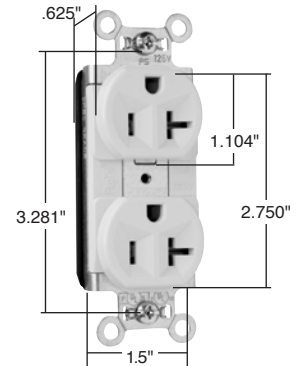

PT5362LA

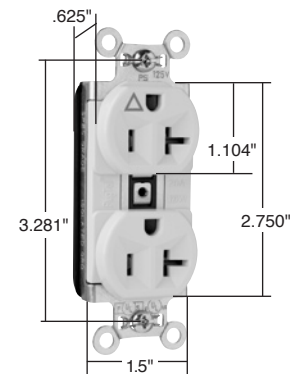

PTIG5362LA



NEMA 5-15R

NEMA 5-20R

Performance			
Electrical			
Dielectric Voltage	Withstands 2000V minimum		
Maximum Working Voltage	125V		
Current Interrupting	Certified for current interrupting at full-rated current (receptacle only)		
Temperature Rise	Maximum 30°C temperature rise at full-rated current after 50 cycles of overload at 150% of rated current with direct current		
Mechanical			
PlugTail Connector Identification	#12 AWG, THHN, copper conductor, 6" leads, stripped, solid or stranded, for use with PlugTail Receptacles only		
Product Identification	Ratings are a permanent part of the device		
Environmental			
Flammability	UL94 V2		
Operating Temperature	Maximum continuous +60°C, minimum -40°C without impact		
PlugTail Receptacle Materials			
Face	Nylon	Integral Ground System	.036 260 Brass
Back Body	PVC	Assembly Drive Screw	Zinc-Plated Steel
Line Contacts	.036 688 Brass	Auto-Ground Clip	Steel
Mounting Strap	.042 Zinc-Plated Steel	Mounting Screws	Tri-Drive Steel
PlugTail Connector Materials			
Housing	Polycarbonate	Contacts	.030 Brass

Consult Straight Blade Section B for complete compliance listing.

Project
Location/Type