

Technical Specifications

Construction Specification Grade Receptacles

Back & Side Wire 2 Pole, 3 Wire Grounding 15 & 20A, 125V

Pass & Seymour




Typical Specifications	
Manufacturer's Identification: Pass & Seymour/Legrand CRB5262	
Description: Straight Blade Duplex Receptacle – Construction Specification Grade	
Type: 2 Pole, 3 Wire Grounding	
Rating: 15A, 125V	
3rd Party Compliance: UL Listed, File Number E140596, Standard UL498, Federal Specification WC596. CSA/CUL approved, File Number LR16063, Standard CSA-C22.2 No. 42. Conforms to NEMA WD-1 and WD-6.	

Catalog Number	Color	Rating	NEMA Config. No.	Catalog Number	Color	Rating	NEMA Config. No.
<input type="checkbox"/> CRB5262I	Ivory	15A 125V	5-15R	<input type="checkbox"/> CRB5262SI	Ivory	15A 125V	5-15R
<input type="checkbox"/> CRB5262W	White	15A 125V	5-15R	<input type="checkbox"/> CRB5262SW	White	15A 125V	5-15R
<input type="checkbox"/> CRB5262	Brown	15A 125V	5-15R	<input type="checkbox"/> CRB5262S	Brown	15A 125V	5-15R
<input type="checkbox"/> CRB5262GRY	Gray	15A 125V	5-15R	<input type="checkbox"/> CRB5262SGRY	Gray	15A 125V	5-15R
<input type="checkbox"/> CRB5262BK	Black	15A 125V	5-15R	<input type="checkbox"/> CRB5262SRED	Red	15A 125V	5-15R
<input type="checkbox"/> CRB5262LA	Lt. Al.	15A 125V	5-15R	<input type="checkbox"/> CRB5262SLA	Lt. Al.	15A 125V	5-15R
<input type="checkbox"/> CRB5262RED	Red	15A 125V	5-15R	<input type="checkbox"/> CRB5362SI	Ivory	20A 125V	5-20R
<input type="checkbox"/> CRB5362I	Ivory	20A 125V	5-20R	<input type="checkbox"/> CRB5362SW	White	20A 125V	5-20R
<input type="checkbox"/> CRB5362W	White	20A 125V	5-20R	<input type="checkbox"/> CRB5362S	Brown	20A 125V	5-20R
<input type="checkbox"/> CRB5362	Brown	20A 125V	5-20R	<input type="checkbox"/> CRB5362SGRY	Gray	20A 125V	5-20R
<input type="checkbox"/> CRB5362GRY	Gray	20A 125V	5-20R	<input type="checkbox"/> CRB5362SRED	Red	20A 125V	5-20R
<input type="checkbox"/> CRB5362BK	Black	20A 125V	5-20R	<input type="checkbox"/> CRB5362SLA	Lt. Al.	20A 125V	5-20R
<input type="checkbox"/> CRB5362LA	Lt. Al.	20A 125V	5-20R				
<input type="checkbox"/> CRB5362RED	Red	20A 125V	5-20R				


Performance			
Electrical			
Dielectric Voltage	Withstands 2000V minimum		
Maximum Working Voltage	250V		
Current Interrupting	Certified for current interrupting at full-rated current		
Temperature Rise	Max 30°C temperature rise at full-rated current after 50 cycles of overload at 150% of rated current with direct current		
Mechanical			
Terminal Identification	Terminal Identification in accordance with UL498 (Brass, White, Green)		
Terminal Accommodation	#14 – #10 AWG copper conductor only		
Product Identification	Ratings are a permanent part of the device		
Environmental			
Flammability	UL94 V2		
Operating Temperature	Maximum continuous +60°C, minimum -40°C (without impact)		
Materials			
Face	Nylon	Terminal Screws	#8 Tri-Drive Brass (Neutral = Nickel-Plated Steel)
Back Body	PVC	Ground Screw	#8 Hex Tri-Drive Steel with Green Zinc Coating
Line Contacts	.032 688 Brass	Assembly Drive Screw	Zinc-Plated Steel
Mounting Strap	.042 Plated Steel	Auto-Ground Clip	Stainless Steel
Ground Contacts	.040 260 Brass	Mounting Screws	Tri-Drive Steel
Pressure Plate	.080 Steel		

Consult Straight Blade Section B for complete compliance listing.



Project
Location/Type

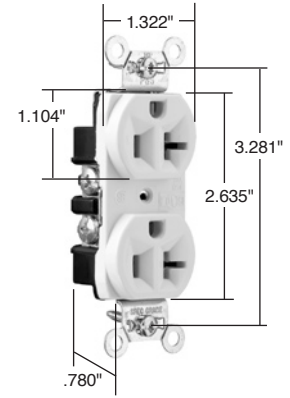

15 & 20 Amp

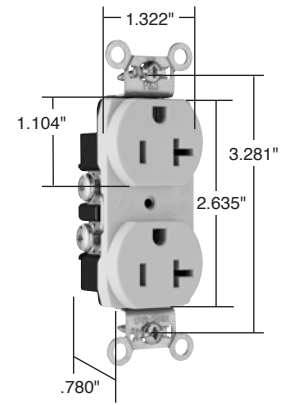

CRB5362SLA






Technical Specifications

Construction Specification Grade Receptacles

2 Pole, 3 Wire Grounding 15 & 20A, 125V

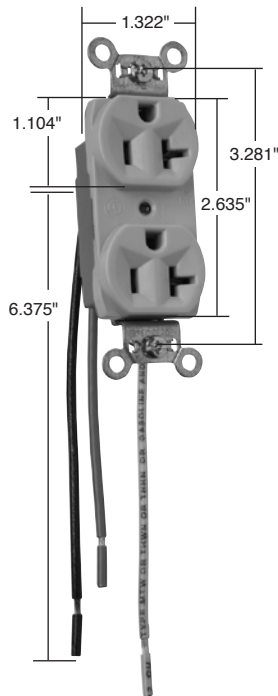

CRL5362LA

Typical Specifications

Manufacturer's Identification: Pass & Seymour/Legrand CRL5262
 Description: Straight Blade Duplex Receptacle – Construction Specification Grade
 Type: 2 Pole, 3 Wire Grounding
 Rating: 15A, 125V
 3rd Party Compliance: UL Listed, File Number E140596, Standard UL498. Federal Specification WC596. CSA/CUL approved, File Number LR16063, Standard CSA-C22.2 No. 42. Conforms to NEMA WD-1 and WD-6.

Catalog Number	Color	Rating	NEMA Config. No.	Catalog Number	Color	Rating	NEMA Config. No.
<input type="checkbox"/> CRL5262IB	Ivory	15A 125V	5-15R	<input type="checkbox"/> CRL5262SCIB	Ivory	15A 125V	5-15R
<input type="checkbox"/> CRL5262WB	White	15A 125V	5-15R	<input type="checkbox"/> CRL5262SCWB	White	15A 125V	5-15R
<input type="checkbox"/> CRL5262B	Brown	15A 125V	5-15R	<input type="checkbox"/> CRL5262SCB	Brown	15A 125V	5-15R
<input type="checkbox"/> CRL5262GRYB	Gray	15A 125V	5-15R	<input type="checkbox"/> CRL5262SCGRYB	Gray	15A 125V	5-15R
<input type="checkbox"/> CRL5262BKB	Black	15A 125V	5-15R	<input type="checkbox"/> CRL5262SCBKB	Black	15A 125V	5-15R
<input type="checkbox"/> CRL5262REDB	Red	15A 125V	5-15R	<input type="checkbox"/> CRL5262SCREDB	Red	15A 125V	5-15R
<input type="checkbox"/> CRL5262LAB	Lt. Al.	15A 125V	5-15R	<input type="checkbox"/> CRL5262SCLAB	Lt. Al.	15A 125V	5-15R
<input type="checkbox"/> CRL5362IB	Ivory	20A 125V	5-20R	<input type="checkbox"/> CRL5362SCIB	Ivory	20A 125V	5-20R
<input type="checkbox"/> CRL5362WB	White	20A 125V	5-20R	<input type="checkbox"/> CRL5362SCWB	White	20A 125V	5-20R
<input type="checkbox"/> CRL5362B	Brown	20A 125V	5-20R	<input type="checkbox"/> CRL5362SCB	Brown	20A 125V	5-20R
<input type="checkbox"/> CRL5362GRYB	Gray	20A 125V	5-20R	<input type="checkbox"/> CRL5362SCGRYB	Gray	20A 125V	5-20R
<input type="checkbox"/> CRL5362BKB	Black	20A 125V	5-20R	<input type="checkbox"/> CRL5362SCBKB	Black	20A 125V	5-20R
<input type="checkbox"/> CRL5362REDB	Red	20A 125V	5-20R	<input type="checkbox"/> CRL5362SCREDB	Red	20A 125V	5-20R
<input type="checkbox"/> CRL5362LAB	Lt. Al.	20A 125V	5-20R	<input type="checkbox"/> CRL5362SCLAB	Lt. Al.	20A 125V	5-20R

Performance

Electrical

Dielectric Voltage Withstands 2000V minimum
 Maximum Working Voltage 250V
 Current Interrupting Certified for current interrupting at full-rated current
 Temperature Rise Maximum 30°C temperature rise at full-rated current after 50 cycles of overload at 150% of rated current with direct current

Mechanical

Lead Identification In accordance with UL498 (White, Black, Green) #12 AWG, THHN, copper conductor, 6" leads, stripped, stranded wire
 Product Identification Ratings are a permanent part of the device

Environmental

Flammability UL94 V2
 Operating Temperature Maximum continuous +60°C, minimum -40°C without impact

Materials

Face	Nylon	Assembly Drive Screw	Plated Steel
Back Body	PVC	Auto-Ground Clip	Stainless Steel
Line Contacts	.032 688 Brass	Mounting Screws	Tri-Drive Steel
Mounting Strap	.042 Plated Steel	Wire	6" Copper THHN

Consult Straight Blade Section B for complete compliance listing.



NEMA 5-15R



NEMA 5-20R

Project

Location/Type