


### PTIG5262, PTIG5362

**PlugTail™. The fastest, most consistent and reliable wiring devices — ever.**

**F**actory-terminated devices and connectors mean that device installation is the same regardless of skill level of the installer. The UL-Listed connectors are keyed to ensure proper wiring installation into each receptacle. The connector simply snaps into the back of the device — no fussing with wires, stripping, or tightening screws. PlugTail devices are finger safe with no exposed terminals, so taping is not required. Now device installation is a snap!

The toughest and safest isolated ground receptacle available.

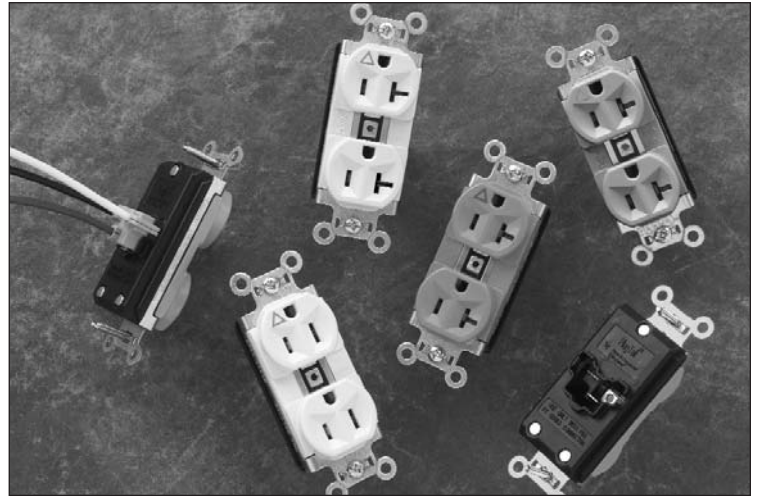

### Features & Benefits

**Auto-ground clip** assures positive ground.

**Built-in connector** features large brass terminal blades to ensure consistent, reliable electrical connections.

**Large brass contacts** snugly terminate on device blade terminals. Audible snapping latch assures connection, allows release.

**Plastic barrier** isolates grounding terminal from mounting strap and metal boxes.

**.036 inch thick, brass, triple-wipe power contacts** for lasting retention.


**Three drive screws anchor strap** to back body and face.

**Plated steel wrap strap design** for maximum durability and corrosion resistance.



PTIG5362-LA

**Ultrasonically welded polycarbonate connector housing** secures terminations and conductors in a UL Listed, finger safe housing.

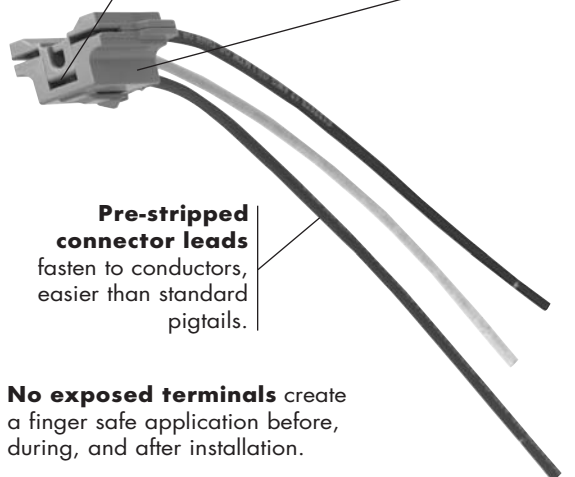

**Pre-stripped connector leads** fasten to conductors, easier than standard pigtails.

**No exposed terminals** create a finger safe application before, during, and after installation.

### Field Uses/Vertical Markets

- Industrial
- Health Care
- Education
- Institutional
- Retail
- Office
- Hospitality/Lodging

# PlugTail™ Devices Receptacles Isolated Ground 15 & 20A, 125V

## Ordering Information

Catalog Number	Rating A. V.	Color	NEMA Config. No.
<b>Duplex Receptacles</b>			
PTIG5262-I	15 125	Ivory	5-15R
PTIG5262-W	15 125	White	5-15R
PTIG5262	15 125	Orange	5-15R
PTIG5262-GRY	15 125	Gray	5-15R
PTIG5262-RED	15 125	Red	5-15R
PTIG5262-LA	15 125	Light Almond	5-15R
PTIG5362-I	20 125	Ivory	5-20R
PTIG5362-W	20 125	White	5-20R
PTIG5362	20 125	Orange	5-20R
PTIG5362-GRY	20 125	Gray	5-20R
PTIG5362-RED	20 125	Red	5-20R
PTIG5362-LA	20 125	Light Almond	5-20R

Catalog Number	Wire Type	Wire Length
<b>PlugTail Connectors</b>		
PT6STR	Stranded	6"
PT6SOL	Solid	6"
PT6STRB25	Stranded	25"
PT6SOLB25	Solid	25"



NEMA  
5-15R



NEMA  
5-20R

For more information on these and other P&S products refer to our Product Guide or visit our web site.

# PlugTail™ Devices Receptacles

## Isolated Ground 15 & 20A, 125V

Pass & Seymour



### Technical Specifications

#### 3rd Party Compliance

cULus Listed, File Number E140596, Standard UL498.  
Federal Specification WC596.

#### Performance

##### Electrical


Dielectric Voltage	Withstands 2000V minimum
Maximum Working Voltage	125V
Current Interrupting	Certified for current interrupting at full-rated current (receptacle only)
Temperature Rise	Maximum 30°C temperature rise at full-rated current after 50 cycles of overload at 150% of rated current with direct current

##### Mechanical

PlugTail Connector Identification	#12 AWG, THHN, copper conductor, 6" or 25" leads, stripped, solid or stranded, for use with PlugTail Receptacles only
Product Identification	Ratings are a permanent part of the device

##### Environmental

Flammability	UL94 V2
Operating Temperature	Maximum continuous +60°C, minimum -40°C without impact

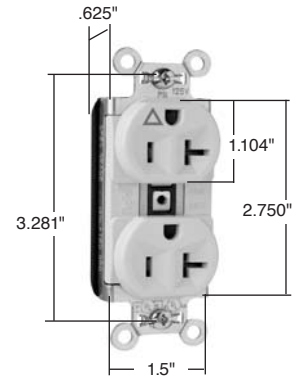

Dimensions for  
15 & 20 Amp




#### Plug Tail Receptacle Materials

Face	Nylon	Integral Ground System	.036 260 Brass
Back Body	PVC	Assembly Drive Screw	Zinc-Plated Steel
Line Contacts	.036 688 Brass	Auto-Ground Clip	Steel
Mounting Strap	.042 Zinc-Plated Steel	Mounting Screws	Tri-Drive Steel

#### Plug Tail Connector Materials

Housing	Polycarbonate	Contacts	.030 Brass
---------	---------------	----------	------------

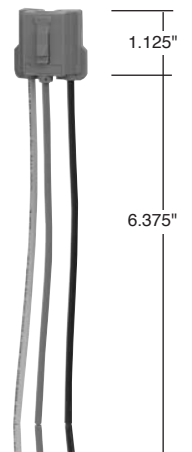


PT6STR

#### Warranty


1 Year

## Complimentary Devices & Accessories

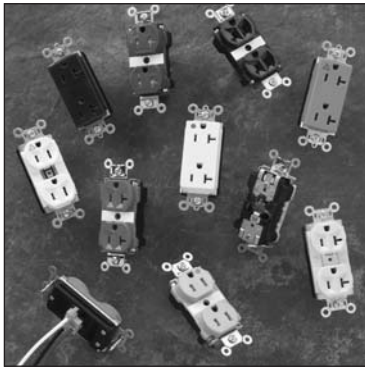


### PLUGTAIL™ DEVICES

- Spec Grade
- Decorator
- Hospital Grade
- Tamper-Resistant
- Isolated Ground

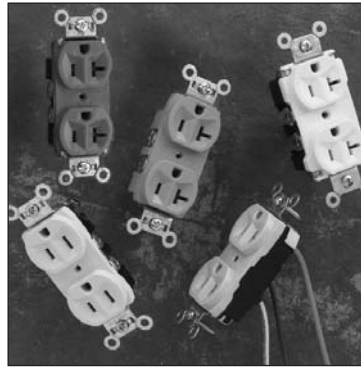


### STRAIGHT BLADE RECEPTACLES

- Extra Heavy-Duty
- Heavy-Duty
- Construction Grade
- Construction Grade Leaded
- Commercial Grade

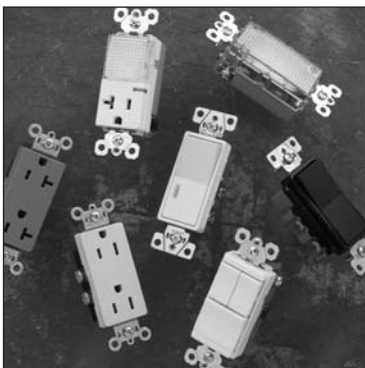


### DECORATOR DEVICES

- Construction Grade Switches
- Specification Grade Combo Switches
- Construction Grade Receptacles
- Commercial Grade Receptacles
- Specification Grade Hallway Lights

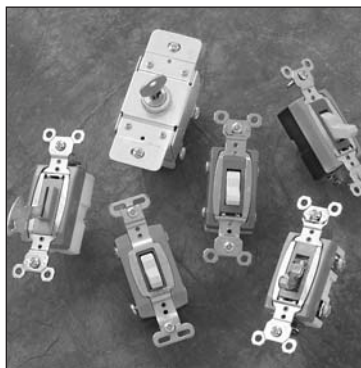

### SWITCHES

- Heavy-Duty Toggle
- Heavy-Duty Lighted Toggle
- Heavy-Duty Security
- Heavy-Duty Locking
- Construction Grade Toggle
- Commercial Grade Toggle

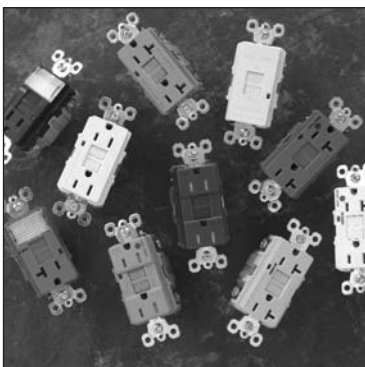

### GFCIs

- Specification Grade
- Hospital Grade
- Dead Front



### WALL PLATES

- TradeMaster® Thermoplastic Nylon
- Stainless Steel
- Brass
- Aluminum
- Dustproof Stainless Steel Covers

## Also available...

- Light Almond Devices
- Hospital Grade Devices
- TVSS & Isolated Ground Devices
- Ground Continuity Monitoring (GCM)
- Straight Blade Plugs & Connectors
- Turnlok® Locking Devices
- Weatherproof Boxes & Covers
- IEC 309 Industrial Products
- Flexcor® Wire Mesh Grips
- Configurable Solutions

**Pass & Seymour**



**USA**  
P.O. Box 4822  
Syracuse, NY 13221-4822  
800-611-7277

**Canada**  
570 Applewood Crescent  
Vaughan, ON, L4K 4B4  
905-738-9195

SF1506R1 — Updated May 2005 — For latest specs visit [www.passandseymour.com](http://www.passandseymour.com)