


**PT1595, PT2095, PT1595-NLTR, PT2095-NLTR, PT1595-TR, PT2095-TR**

## PlugTail™ GFCIs — The fastest, most consistent and reliable wiring devices – ever.

**P**&S PlugTail™ wiring devices offer unique installation speed and no call-back accuracy in every type of receptacle you'll need for any commercial job. The revolutionary PlugTail GFCIs work with the existing 3 wire PlugTail connector creating a finger safe application. At rough-in just install the same right angle connector for the GFCI and receptacles.

For Hospital Grade PlugTail GFCIs, refer to SF721R2.

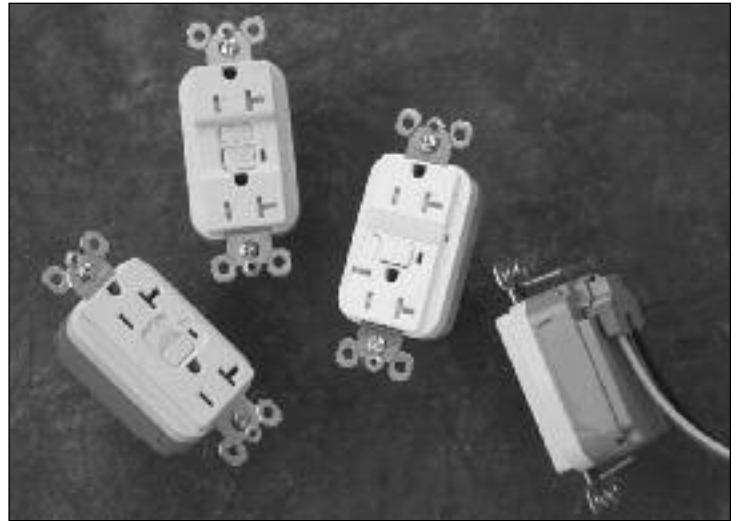

### Features & Benefits

**Zinc-plated steel mounting strap.**

**Built-in connector** features large brass terminal blades to ensure consistent, reliable electrical connections.


**GFCI works with the existing three wire PlugTail connectors** creating a non-feed thru application for facility owners. At rough in just install the same right angle connector for GFCI and receptacle openings.

**Trip indicator light** (red lamp) makes it easy to identify tripped condition.

**Large brass contacts** snugly terminate on device blade terminals. Audible snapping latch assures connection, allows release.

**The most durable GFCI available.**  
Exceeds UL943 voltage surge requirements; survives 100x the required UL 3kA/6kV voltage surge test cycles.

**Ultrasonically welded polycarbonate connector housing** secures terminations and conductors in a UL Listed, finger safe housing.

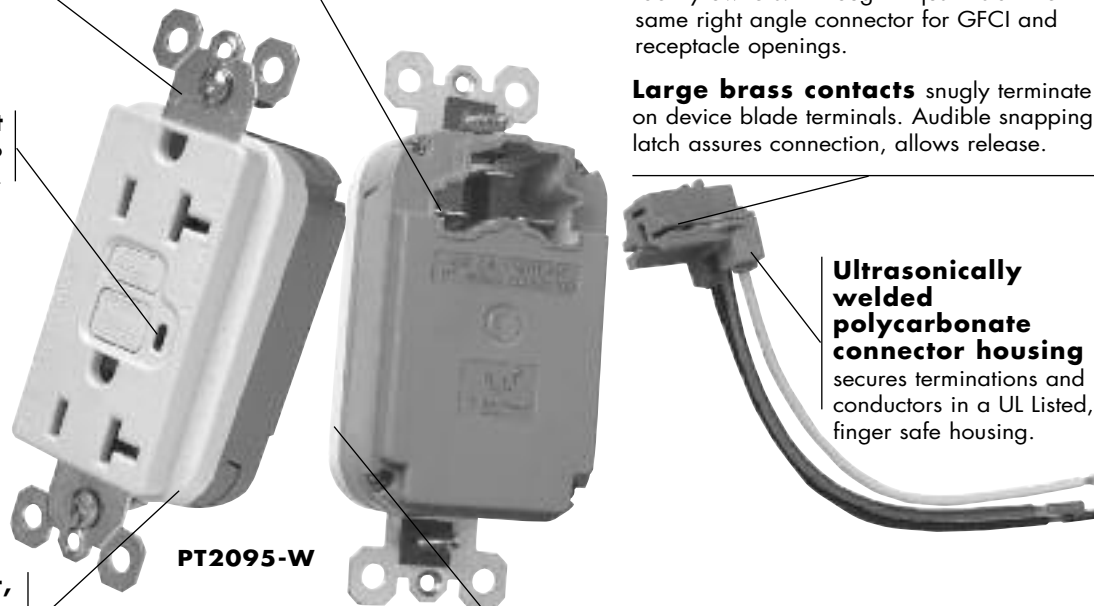

**PT2095-W**

**High-impact-resistant, nylon construction** for superior strength and durability.

**Meets Federal Specification requirements.**




**No exposed terminals** create a finger safe application before, during, and after installation.

### Field Uses/Vertical Markets

- Industrial
- Health Care
- Education
- Institutional
- Retail
- Office
- Hospitality/Lodging
- Multiple Dwelling

# GFCIs PlugTail™ Specification Grade 15 & 20A, 125VAC


## Ordering Information

Additional Features & Benefits	Catalog Number	Rating A. VAC	Color	NEMA Config. No.
<b>PlugTail™ GFCI Receptacles</b>				
 <p><b>Patented SafeLock™ Protection</b> is standard on all P&amp;S Specification Grade GFCIs.</p>	<b>PT1595-*</b>	15 125	I, W, Brown, GRY, BK, RED, LA	5-15R
	<b>PT2095-*</b>	20 125	I, W, Brown, GRY, BK, RED, LA	5-20R
<b>PlugTail™ Tamper-Resistant GFCI Receptacles</b>				
 <p><b>Dual mechanical shutter system</b> to help prevent insertion of foreign objects. <b>Patented UL Listed shutter system.</b></p>	<b>PT1595-TR*</b>	15 125	I, W, Brown, GRY, BK, RED, LA	5-15R
	<b>PT2095-TR*</b>	20 125	I, W, Brown, GRY, BK, RED, LA	5-20R
<b>PlugTail™ Combination Tamper-Resistant Nightlight/GFCI Receptacles</b>				
 <p><b>High impact-resistant lens</b> made of Lexan®. <b>Energy-efficient LED</b> has average 20-year life expectancy, eliminating bulb replacement. <b>Photocell</b> turns nightlight ON in dark, OFF in daylight. <b>Two receptacles.</b> <b>Tamper-resistant shutters.</b></p>	<b>PT1595-NTLTR*</b>	15 125	I, W, GRY, BK, RED, LA	5-15R
	<b>PT2095-NTLTR*</b>	20 125	I, W, GRY, BK, RED, LA	5-20R

Catalog Number	Wire Type	Wire Length
<b>PlugTail Connectors — Right Angle</b>		
<b>PTRA6STR</b>	Stranded	6"
<b>PTRA6SOL</b>	Solid	6"

**\*Color Designation**

I	Ivory	GRY	Gray	RED	Red
W	White	BK	Black	LA	Light Almond
-	Brown				



**GFCI - Specific Additional Features & Benefits:**

**Fits all electrical box and raceway applications.** Right angle (90°) connector creates an easy mounting application.

**Supplied with TP26 Decorator nylon wall plate.**

For more information on these and other P&S products refer to our Catalog or visit our web site.

# PlugTail™ Specification Grade GFCIs

## 15 & 20A, 125VAC

Pass & Seymour



### Technical Specifications

#### 3rd Party Compliance

cULus Listed File Number E42190 and E140596, Standard UL498 Attachment Plugs and Receptacles, UL943 GFCIs. Federal Specification WC596. Standard CSA C22.2 No. 42 General Use Receptacles, CSA C22.2 No. 144 GFCIs. Conforms to NEMA WD-1 and WD-6.

#### Performance

Electrical	
Dielectric Voltage	Withstands 1500V minimum
Trip Level	4 to 6 mA
Trip Time	.025 Second Nominal
Frequency	60 Hz
Maximum Working Voltage	125VAC
Voltage Range	102-132VAC
Mechanical	
PlugTail Connector Identification	#12 AWG, THHN, copper conductor, 6" leads, stripped, solid or stranded, for use with PlugTail Receptacles only
Product Identification	Ratings are a permanent part of the device
Environmental	
Operating Temperature	-35°C to +66°C
Maximum Humidity	95%
Flammability	UL94 V2

#### PlugTail™ GFCI Receptacle Materials

Face	Nylon	Test/Reset Buttons	Nylon
Body	Nylon	Nightlight Lens	* Lexan®
Contacts	.03" Brass (.8)	Tamper-Resistant Shutter	** Thermoplastic
Mounting Straps	.05" Zinc-Plated Steel (1.3)		

#### Plug Tail Connector Materials


Housing	Polycarbonate	Contacts	.030 Brass
---------	---------------	----------	------------

\* For PT1595-NLTR and PT2095-NLTR Nightlight versions only.

\*\* For PT1595-TR and PT2095-TR Tamper-Resistant versions and PT1595-NLTR and PT2095-NLTR Nightlight versions only.

#### Warranty

1 Year

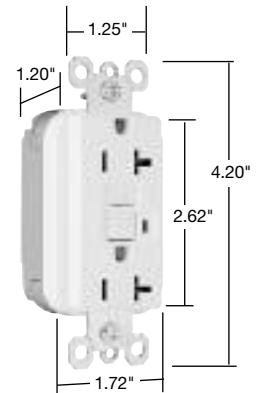


Dimensions for 15 & 20 Amp



Tamper-Resistant Nightlight/GFCI




Tamper-Resistant

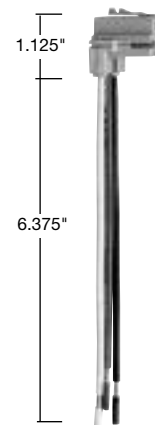


PTR6STR

## Complementary Devices & Accessories

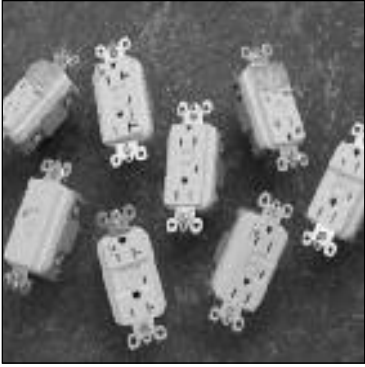


### GFCIs

- Specification Grade

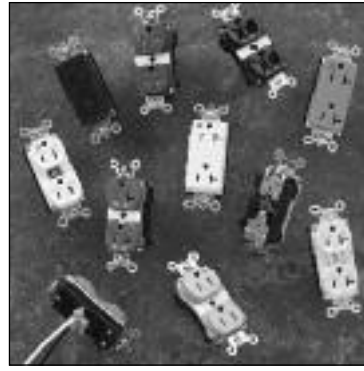


### PLUGTAIL™ DEVICES

- Spec Grade
- Decorator
- Hospital Grade
- Tamper-Resistant
- Isolated Ground

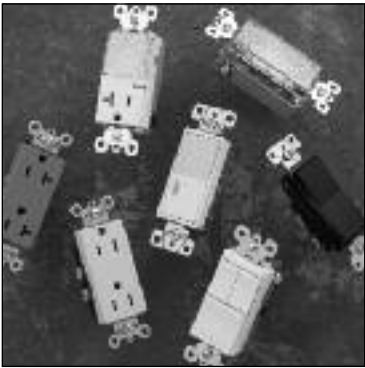

### DECORATOR DEVICES

- Construction Grade Switches
- Specification Grade Combo Switches
- Construction Grade Receptacles
- Commercial Grade Receptacles
- Specification Grade Hallway Lights

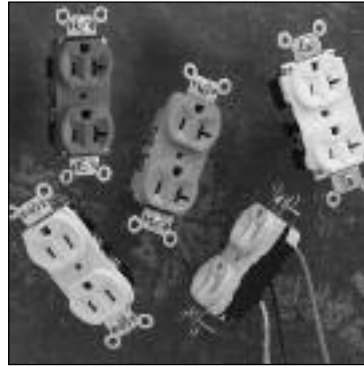

### STRAIGHT BLADE RECEPTACLES

- Extra Heavy-Duty
- Heavy-Duty
- Hard Use
- Construction Grade
- Construction Grade Leaded
- Commercial Grade



### SWITCHES

- Heavy-Duty Toggle
- Heavy-Duty Lighted Toggle
- Heavy-Duty Security
- Heavy-Duty Locking
- Construction Grade Toggle
- Commercial Grade Toggle



### WALL PLATES

- TradeMaster® Thermoplastic Nylon
- Screwless Polycarbonate
- Stainless Steel
- Brass
- Aluminum
- Dustproof Stainless Steel Covers

## Also available...

- Light Almond Devices
- Hospital Grade Devices
- TVSS & Isolated Ground Devices
- Ground Continuity Monitoring (GCM)
- Straight Blade Plugs & Connectors
- Turnlok® Locking Devices
- Weatherproof Boxes & Covers
- IEC 309 Industrial Products
- Flexcor® Wire Mesh Grips
- Configurable Solutions

**Pass & Seymour**



**USA**

P.O. Box 4822  
Syracuse, NY 13221-4822  
800-611-7277

**Canada**

570 Applewood Crescent  
Vaughan, ON, L4K 4B4  
905-738-9195

SF1104R2 — Updated February 2009 — For latest specs visit [www.passandseymour.com](http://www.passandseymour.com)