

PT26252, PT26352

PlugTail™. The fastest, most consistent and reliable wiring devices — ever.

Factory-terminated devices and connectors mean that device installation is the same regardless of skill level of the installer. The UL-Listed connectors are keyed to ensure proper wiring installation into each receptacle. The connector simply snaps into the back of the device — no fussing with wires, stripping, or tightening screws. PlugTail devices are finger safe with no exposed terminals, so taping is not required. Now device installation is a snap!

The toughest and safest decorator receptacle available.



Features & Benefits

Auto-ground clip assures positive ground.

Built-in connector features large brass terminal blades to ensure consistent, reliable electrical connections.

Large brass contacts snugly terminate on device blade terminals. Audible snapping latch assures connection, allows release.

.036 inch thick, brass, triple-wipe power contacts for lasting retention.


Three drive screws anchor strap to back body and face.

Plated steel wrap strap design for maximum durability and corrosion resistance.



PT26352-LA

Ultrasonically welded polycarbonate connector housing secures terminations and conductors in a UL Listed, finger safe housing.

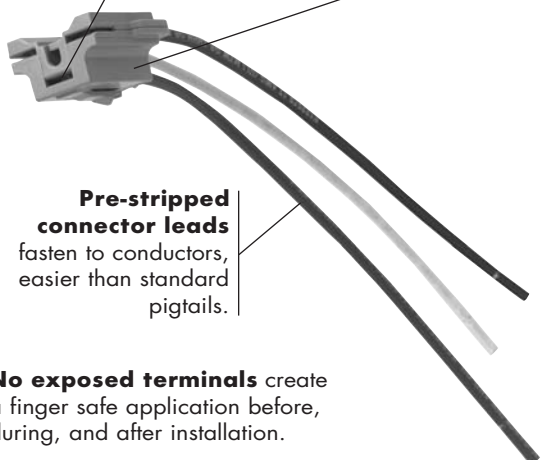

Pre-stripped connector leads fasten to conductors, easier than standard pigtailed.

No exposed terminals create a finger safe application before, during, and after installation.

Field Uses/Vertical Markets

- Education
- Institutional
- Retail
- Office
- Hospitality/Lodging
- Multiple Dwelling

PlugTail™ Devices Decorator Receptacles Spec Grade 15 & 20A, 125V

Ordering Information

Catalog Number	Rating A. V.	Color	NEMA Config. No.
Duplex Receptacles			
PT26252-I	15 125	Ivory	5-15R
PT26252-W	15 125	White	5-15R
PT26252	15 125	Brown	5-15R
PT26252-GRY	15 125	Gray	5-15R
PT26252-BK	15 125	Black	5-15R
PT26252-RED	15 125	Red	5-15R
PT26252-LA	15 125	Light Almond	5-15R
PT26352-I	20 125	Ivory	5-20R
PT26352-W	20 125	White	5-20R
PT26352	20 125	Brown	5-20R
PT26352-GRY	20 125	Gray	5-20R
PT26352-BK	20 125	Black	5-20R
PT26352-RED	20 125	Red	5-20R
PT26352-LA	20 125	Light Almond	5-20R

Catalog Number	Wire Type	Wire Length
PlugTail Connectors		
PT6STR	Stranded	6"
PT6SOL	Solid	6"
PT6STRB25	Stranded	25"
PT6SOLB25	Solid	25"



NEMA
5-15R



NEMA
5-20R

For more information on these and other P&S products refer to our Product Guide or visit our web site.

PlugTail™ Devices Decorator Receptacles Spec Grade 15 & 20A, 125V


Pass & Seymour



Technical Specifications

3rd Party Compliance	
cULus Listed, File Number E140596, Standard UL498. Federal Specification WC596.	

Performance	
Electrical	
Dielectric Voltage	Withstands 2000V minimum
Maximum Working Voltage	125V
Current Interrupting	Certified for current interrupting at full-rated current (receptacle only)
Temperature Rise	Maximum 30°C temperature rise at full-rated current after 50 cycles of overload at 150% of rated current with direct current
Mechanical	
PlugTail Connector Identification	#12 AWG, THHN, copper conductor, 6" or 25" leads, stripped, solid or stranded, for use with PlugTail Receptacles only
Product Identification	Ratings are a permanent part of the device
Environmental	
Flammability	UL94 V2
Operating Temperature	Maximum continuous +60°C, minimum -40°C without impact

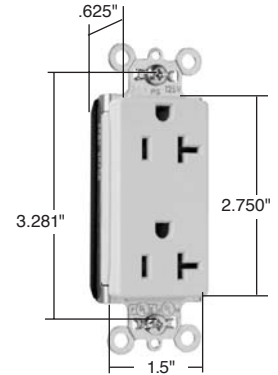

Dimensions for
15 & 20 Amp




Plug Tail Receptacle Materials			
Face	Nylon	Integral Ground System	.036 260 Brass
Back Body	PVC	Assembly Drive Screw	Zinc-Plated Steel
Line Contacts	.036 688 Brass	Auto-Ground Clip	Steel
Mounting Strap	.042 Zinc-Plated Steel	Mounting Screws	Tri-Drive Steel

Plug Tail Connector Materials			
Housing	Polycarbonate	Contacts	.030 Brass


Warranty

1 Year

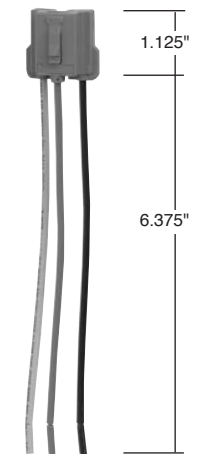


PT6STR

Complimentary Devices & Accessories

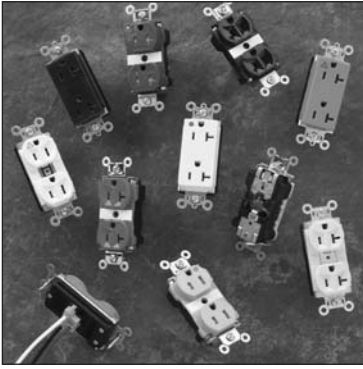


PLUGTAIL™ DEVICES

- Spec Grade
- Decorator
- Hospital Grade
- Tamper-Resistant
- Isolated Ground

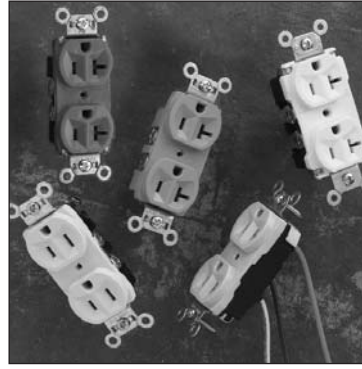


STRAIGHT BLADE RECEPTACLES

- Extra Heavy-Duty
- Heavy-Duty
- Construction Grade
- Construction Grade Leaded
- Commercial Grade

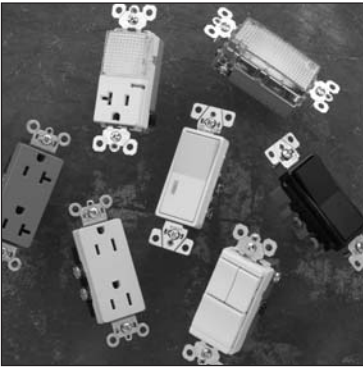


DECORATOR DEVICES

- Construction Grade Switches
- Specification Grade Combo Switches
- Construction Grade Receptacles
- Commercial Grade Receptacles
- Specification Grade Hallway Lights

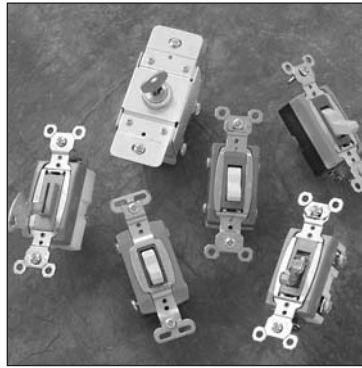

SWITCHES

- Heavy-Duty Toggle
- Heavy-Duty Lighted Toggle
- Heavy-Duty Security
- Heavy-Duty Locking
- Construction Grade Toggle
- Commercial Grade Toggle

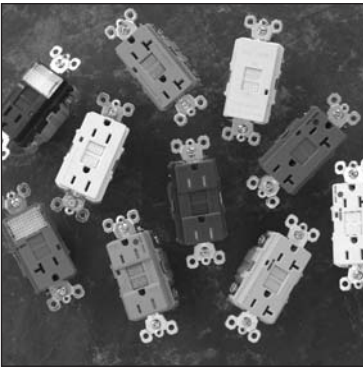

GFCIs

- Specification Grade
- Hospital Grade
- Dead Front



WALL PLATES

- TradeMaster® Thermoplastic Nylon
- Stainless Steel
- Brass
- Aluminum
- Dustproof Stainless Steel Covers

Also available...

- Light Almond Devices
- Hospital Grade Devices
- TVSS & Isolated Ground Devices
- Ground Continuity Monitoring (GCM)
- Straight Blade Plugs & Connectors
- Turnlok® Locking Devices
- Weatherproof Boxes & Covers
- IEC 309 Industrial Products
- Flexcor® Wire Mesh Grips
- Configurable Solutions

Pass & Seymour



USA
P.O. Box 4822
Syracuse, NY 13221-4822
800-611-7277

Canada
570 Applewood Crescent
Vaughan, ON, L4K 4B4
905-738-9195

SF1507R1 — Updated May 2005 — For latest specs visit www.passandseymour.com